




CAD数据文件名: 42\_Casters

CAD数据文件名: 42\_Casters

请按照选型步骤①~④选择型式和参数后进行订购。


Order 订货范例	型式 (1Type · 2D)	3 轮材质
	CHAMJ-E75	U
	CHAMJ-S65	R

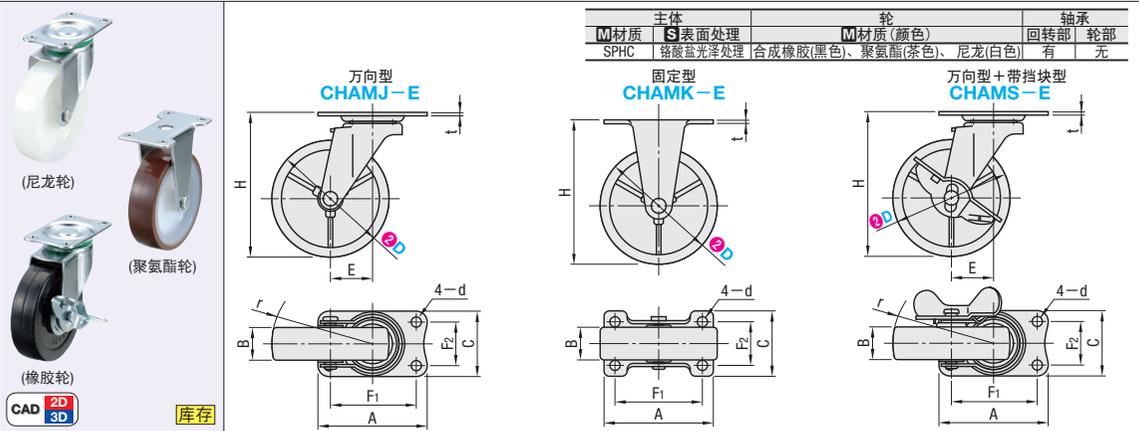

主体类型	型式 ①Type	②D	③轮材质	容许負載 (N)												重量 (g)					
				H	A	C	F1	F2	d	E	r	R	U	N	t	R	U	N			
万向型	CHAMJ-E	50	R (橡胶)	65	70	42	56	28	6.5	22	47	20	21	21	2	300	380	400	180	165	150
		65		82	70	42	56	28	6.5	23	56	21	21	21	2	400	450	500	250	200	190
		75		92	100	58	82	40	8.8	27	65	21	21	21	2	500	600	600	285	215	200
		100		122	100	58	82	40	8.8	31	82	25	28	25	2.3	500	600	600	465	420	420
固定型	CHAMK-E	50	U (聚氨酯)	65	70	42	56	28	6.5	-	-	20	21	21	2	300	380	400	140	120	110
		65		82	70	42	56	28	6.5	-	-	21	21	21	2	400	450	500	195	145	135
		75		92	100	58	82	40	8.8	-	-	21	21	21	2	500	600	600	230	160	145
		100		122	100	58	82	40	8.8	-	-	25	28	25	2.3	500	600	600	505	345	325
万向型+带挡块型	CHAMS-E	50	N (尼龙)	65	70	42	56	28	6.5	22	47	20	21	21	2	300	380	400	205	185	170
		65		82	70	42	56	28	6.5	23	56	21	21	21	2	400	400	400	285	215	215
		75		92	100	58	82	40	8.8	27	65	21	21	21	2	500	450	500	320	250	230
		100		122	100	58	82	40	8.8	31	82	25	28	25	2.3	500	600	600	670	525	475

遇特殊期间交期有变更, 详情请见 P.9.

主体		轮		轴承	
M材质	S表面处理	M材质(颜色)	回转部	轮部	轮部
SPHC	铬酸盐光泽处理	合成橡胶(黑色)、聚氨酯(茶色)、尼龙(白色)	有	有	无

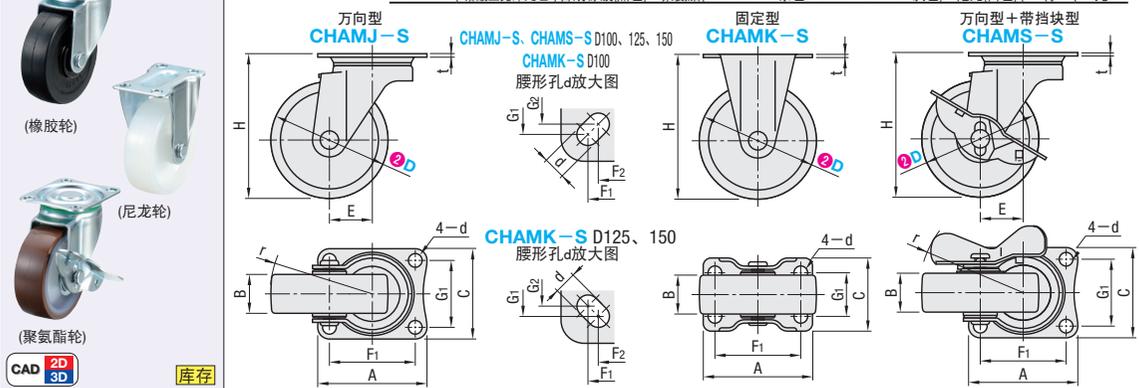

主体类型	型式 ①Type	②D	③轮材质	容许負載 (N)												重量 (g)								
				H	A	C	F1	F2	G1	G2	d	E	r	R	U	N	t	R	U	N				
万向型	CHAMJ-S	50	R (橡胶)	70	70	58	55	-	42	-	8.8	27	53	28	25	28	2.3	500	600	600	325	305	290	
		65		85	70	58	55	-	42	-	8.8	28	61	25	26	25	2.3	600	700	700	375	325	310	
		75		93	100	90	90	71	68	71	68	11	32	66	32	32	32	3.2	1200	1000	800	420	345	325
		100		132	100	90	71	68	71	68	11	32	83	32	32	32	32	3.2	1500	1300	1200	920	790	770
		125		168	102	102	80	75	80	75	11	40	105	38	40	40	40	3.2	1500	1300	1500	1505	1465	1315
固定型	CHAMK-S	50	U (聚氨酯)	70	70	47	55	-	28	-	8.8	27	53	28	25	28	2.3	500	600	600	195	175	160	
		65		85	70	47	55	-	28	-	8.8	28	61	25	26	25	2.3	600	700	800	295	220	200	
		75		93	100	75	90	80	50	45	-	11	32	83	32	32	32	2.6	1200	1000	1200	740	610	585
		100		132	110	75	90	80	50	45	-	11	32	83	32	32	32	2.6	1500	1300	1500	1135	1090	945
		125		168	136	100	112	100	56	53	11	40	105	38	40	40	40	3.0	1500	1300	1500	1135	1090	945
万向+带挡块型	CHAMS-S	50	N (尼龙)	70	70	58	55	-	42	-	8.8	27	53	28	25	28	2.3	500	600	600	345	335	310	
		65		85	70	58	55	-	42	-	8.8	28	61	25	26	25	2.3	600	700	700	430	375	350	
		75		93	100	90	90	71	68	71	68	11	32	86	32	32	32	3.2	600	700	800	470	380	360
		100		132	100	90	71	68	71	68	11	32	86	32	32	32	32	3.2	1200	1000	1200	1005	875	850
		125		168	102	102	80	75	80	75	11	40	108	38	40	40	40	3.2	1500	1300	1500	1690	1650	1505

Delivery 交货期 库存品 隔日上海·广州发货 P.9 (17:00前订购的库存品可当日发货。)

数量分类	标准订购	特殊订购
小单	1~200	201~
大单	通常	另行报价

超过表中所示的数量时, 请在WOS中确认。 P.9


请按照选型步骤①~④选择型式和参数后进行订购。

Order 订货范例	型式 (1Type · 2D)	3 轮材质
	CRJJDG100	U
	CSMKU125	-



Type	主体		轮		轴承	
	M材质	S表面处理	M材质(颜色)	回转部	轮部	轮部
CRJJDG · CRKDG · CRSRDG	SPHC	铬酸盐光泽处理	导电性橡胶(黑色)*	有	有	无
CSRJJDG · CSRKDG · CSRSDG	SUS304	滚筒抛光	橡胶(黑色)			
CSMJU · CSMKU · CSMSPU	SUS304	滚筒抛光	聚氨酯(灰色)			
			尼龙(白色)			

\*导电性橡胶体固有电阻率10<sup>2</sup>~10<sup>4</sup>Ω·cm

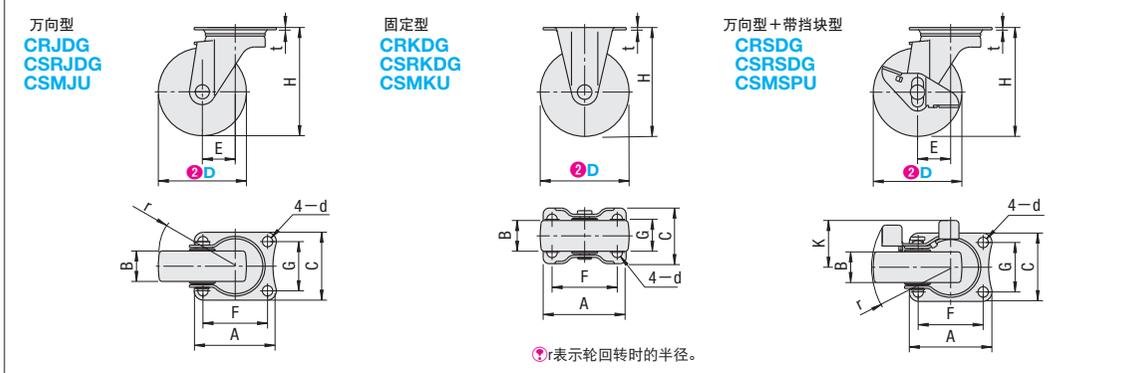

r表示轮回转时的半径。

导电型轮型

主体类型	型式		②D	B	H	A	C	r		K		F	d	t	E	G	容许負載 (N)			重量 (g)
	①钢型	①不锈钢型						钢型	不锈钢型	钢型	不锈钢型						R	U	N	
万向型	CRJJDG	CSRJJDG	50	20	65	70	42	47	47	-	-	56	6.5	2	22	28	300	190	300	190
			65	25	85	70	58	61	61	-	-	55	8.8	2.3	27	42	500	370	500	370
			75	25	93	100	58	66	66	-	-	82	8.8	2.3	28	42	600	420	600	420
			100	25	122	100	58	82	82	-	-	82	8.8	2.3	31	40	500	600	500	600
固定型	CRKDG	CSRKDG	50	20	65	70	42	-	-	-	-	56	6.5	2	-	28	300	140	300	140
			65	25	85	70	47	-	-	-	-	55	8.8	2.3	-	28	500	250	500	250
			75	25	93	100	47	-	-	-	-	82	8.8	2.3	-	40	600	290	600	290
			100	25	122	100	58	-	-	-	-	82	8.8	2.3	-	40	500	510	500	510
带挡块型	CRSDG	CSRSDG	50	20	65	70	42	51	51	32	31	56	6.5	2	22	28	300	210	300	210
			65	25	85	70	58	67	67	43	40	55	8.8	2.3	27	42	500	430	500	430
			75	25	93	100	58	68	68	44	43	82	8.8	2.3	28	42	600	470	600	470
			100	25	122	100	58	82	82	44	43	82	8.8	2.3	31	40	500	670	500	670

主体不锈钢型

主体类型	型式		③轮材质	B			H	A	C	F1	F2	d	t	E	G1	G2	K	r	容许負載 (N)			重量 (g)		
	①Type	②D		R	U	N													R	U	N			
万向型	CSMJU	75	R (橡胶)*1	25	26	25	93	70	58	55	-	8.8	2.3	28	42	-	-	-	66	600	700	800	390	
				29	32	32	132	90	90	71	68	-	11	3	32	71	68	-	82	800	1000	1000	950	
				32	32	32	168	102	102	80	75	11	3	36	80	75	-	99	1000	1200	-	1230		
				40	40	40	190	102	102	80	75	11	3	40	80	75	-	115	-	1800	1600	1500	1500	
				40	40	40	190	102	102	80	75	11	3	40	80	75	-	115	-	1800	1600	1290	1290	
固定型	CSMKU	100	U (聚氨酯)	25	26	25	93	70	47	55	-	8.8	2.3	28	42	-	-	-	600	700	800	270		
				29	32	32	132	110	75	90	80	-	11	3	32	71	68	-	800	1000	1000	720		
				32	32	32	168	140	94	112	100	11	3	36	80	75	-	1000	1200	-	1180			
				40	40	40	190	102	102	80	75	11	3	40	80	75	-	115	-	1800	1600	1290	1290	
				40	40	40	190	102	102	80	75	11	3	40	80	75	-	115	-	1800	1600	1290	1290	
带挡块型	CSMSPU	150	N (尼龙)*2	25	26	25	93	70	58	55	-	8.8	2.3	28	42	-	43	68	600	700	800	430		
				29	32	32	132	90	90	71	68	-	11	3	32	71	68	55	86	800	1000	1000	1060	
				32	32	32	168	102	102	80	75	11	3	36	80	75	-	54	97	1000	1200	-	1340	
				40	40	40	190	102	102	80	75	11	3	40	80	75	-	65	115	-	1800	1600	1720	1720
				40	40	4																		