



最快当天发货

CAD数据文件名：50_Cylinders

■特长：备有不同表面硬度类型。




Order
订货范例

型式(Type・D)


HLRA8

标准加工品



库存 RoHS10

Type	M材质	S表面处理	H表面硬度
HLRA	相当于S45C	扩散渗氮	500HV~

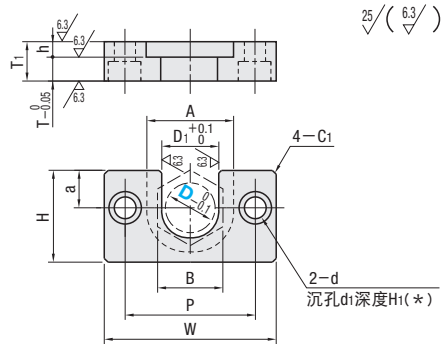

①经扩散渗氮处理可能会发生表面色差现象，但对功能无影响。
②“扩散渗氮”的详情请参阅P2909。

型式		T	B	D ₁	A	T ₁	h	W	H	a	P	d	d ₁	H ₁
Type	D													
HLRA	4	4	6	4.5	9	8	4	30	10	4	20	4.5	8	4.4
	6		8	6.5	12			34	13	5	24			
	7		10	8	14			36	15	6	26			
	8	6	12	9	17	10	5	42	18	7	30	5.5	9.5	5.4
	10		14	11	19	11		44	20	8	32			
	13	8	17	14	23	13		52	24	10	38	6.6	11	6.5
	16		21	18	28			56	30	12	42			
	18		12	23	20	31		17	66	34	14	48	9	14
	21	26		23	34	70			36	15	52			
	25	15		30	27	38	21	6	84	43	19	62	11	17
27	20	32	29	40	27	7								



Delivery
交货期



库存品

① 隔日上海・广州发货 P.9
(17:00前订购的库存品可当日发货。)

数量分类	标准订购	特殊订购
数量	1~30	31~
交货期	通常	另行报价

② 超过表中标示的数量时，
请在WOS中确认。 P.9




Alterations
追加加工



型式

— (HC)


HLRA8 — HC30

Alteration Code	变更高度指定 HC																								
Spec.																									
	①HC的范围如下所示。																								
	<table><tr><th>D</th><th>HC指定单位1mm</th><th>a</th></tr><tr><td>4</td><td>12~20</td><td rowspan="10">H/2</td></tr><tr><td>6</td><td>16~25</td></tr><tr><td>7</td><td>18~30</td></tr><tr><td>8</td><td>22~30</td></tr><tr><td>10</td><td>24~35</td></tr><tr><td>13</td><td>28~40</td></tr><tr><td>16</td><td>36~45</td></tr><tr><td>18</td><td>40~50</td></tr><tr><td>21</td><td>42~50</td></tr><tr><td>25</td><td>48~60</td></tr></table>	D	HC指定单位1mm	a	4	12~20	H/2	6	16~25	7	18~30	8	22~30	10	24~35	13	28~40	16	36~45	18	40~50	21	42~50	25	48~60
	D	HC指定单位1mm	a																						
	4	12~20	H/2																						
	6	16~25																							
	7	18~30																							
	8	22~30																							
	10	24~35																							
	13	28~40																							
16	36~45																								
18	40~50																								
21	42~50																								
25	48~60																								
⊗D27不适用																									



Example
使用范例

浮动接头固定座的使用范例



最快当天发货

CAD数据文件名：50_Cylinders

■特长：也可指定上下的安装方向和高度h。




Order
订货范例

型式(Type・D)


HLRC13

标准加工品



库存 RoHS10

固定方法	高度h固定	M材质	S表面处理	H表面硬度
顶部安装型	HLRC	相当于S45C	扩散渗氮	500HV~



①经扩散渗氮处理可能会发生表面色差现象，但对功能无影响。
②“扩散渗氮”的详情请参阅P2909。

■h尺寸固定型

型式		h	H	B	D ₁	A	T	T ₁	W	P	d	d ₁	H ₁	M
Type	D													
顶部安装 HLRC	4	6	h+4	6	4.5	9	4	8	30	20	3.5	6.5	3.5	3
	6	8	h+5	8	6.5	12		10	34	24	4.5	8	4.5	4
	7	9	h+6	10	8	14		10	36	26	4.5	8	4.5	4
	8	11	h+7	12	9	17	6	12	42	30	5.5	9.5	5.5	5
	10	12	h+8	14	11	19		12	44	32	5.5	9.5	5.5	5
	13	14	h+10	17	14	23	8	13	52	38	6.6	11	6.5	6
	16	18	h+12	21	18	28		13	56	42	6.6	11	6.5	6
	18	20	h+14	23	20	31		17	66	48	6.6	11	6.5	6
	21	21	h+15	26	23	34	12	17	70	52	9	14	9	8
	25	24	h+19	30	27	38		17	70	52	9	14	9	8
	27	24	h+19	32	29	40		20	84	62	11	17	11	10



Delivery
交货期



库存品

① 隔日上海・广州发货 P.9
(17:00前订购的库存品可当日发货。)

